



EPS 100

Electronic Power Supply

System-Features

- 10 kW maximum power
- continuously variable power control
- service- and installation-friendly due to pluggable connections
- less space required/ reduced footprint

Advantages

- 10% increase in efficiency
- improved reignition
- longer lamp life
- compact design

EPS 100

The **EPS 100** is an electronic power supply for UV discharge lamps with a maximum **power of 7.6 kW to 10.0 kW**. The EPS is ideal for doped lamps with an arc length up to 500 mm and mercury lamps up to 680 mm.

Features

The **rectangular current output of the EPS causes an approximately 10% greater UV yield** for the same electrical power compared to the **sinusoidal power output of a conventional transformer/ choke ballast**.

Additional features:


- integrated ignitor
- improved lamp re-ignition compared to conventional technology
- compact design, approximately 50% smaller footprint for a 10-lamp-system
- continuously variable power control, application dependent between 11% and 100%

Technical Data

Maximum power output as per specification	7.6 kW to 10.0 kW in steps of 0,4 kW
Mains supply	400 V – 480 V, 50/60 Hz
Power control	11 % - 100 % with analog signal 1,1 V - 10 V DC application depending
Potential free error signals	Total error Lamp error Earth fault Phase loss Over temperature
Output signals	UV ready UV on

Application example

Switch cabinet with 10 EPS:
10 x 7,6 to 10,0 kW

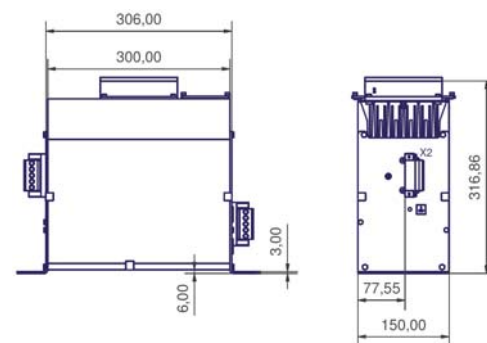

hönle group		Curing	Drying	Bonding	Potting	Measuring
aladin	eleco-efd	eltosch	hönle	mitronic	panacol	printconcept
						uv-technik speziallampen



Dr. Höhle AG UV Technology, Lochhamer Schlag 1, 82166 Gräfelfing/München, Germany
Phone: +49 89 85608-0, Fax: +49 89 85608-148. www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Dr. Höhle AG. Updated 10/11.