



UVACUBE 100

Compact UV curing chamber

System-Features

- different spectra
- shutter

Advantages

- homogenous irradiation
- economic




UVACUBE 100

The UVACUBE 100 is an UV curing chamber for laboratory use and manufacture by hand. By using different UV lamps, UVACUBE 100 can be used for a large variety of applications and offers individual process solutions.

The UVACUBE 100 has a manually operated shutter and meets the highest demands in operational safety and ease of handling.

Applications

- Curing of adhesives and plastics
- Curing of inks, varnishes and coatings
- UV irradiation for chemical and biological applications




Different lamp spectra

Hönle UV lamps offer outstanding power yield with long lamp life. There are three different spectra available: iron, gallium and mercury (see front).

Compact dimensions

The UVACUBE 100 has a useful working capacity of 18 x 18 x 18 cm (HxWxD) and is suitable for small component applications. Optimised lamp reflectors and interior provide **uniform irradiation (approx. +/- 10% at base of chamber)**.

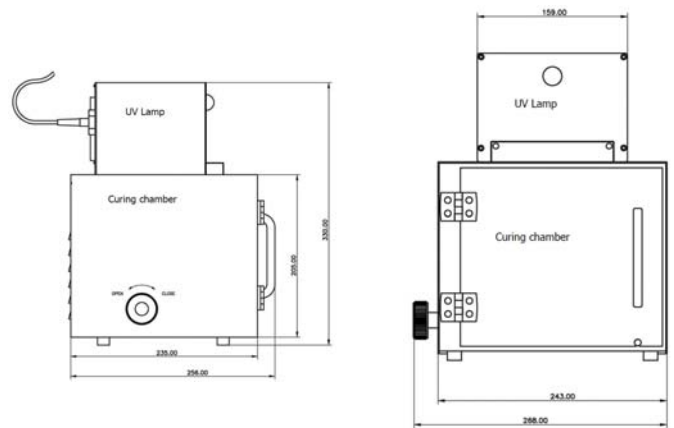

Side view (left) and front view (right) of UVACUBE 100

Safety of operation

Safety of operation is provided through interlocking. The door is locked when the shutter is open and the shutter is locked when the door is open.

Technical Data

- Supply voltage: 230 V / 50 Hz
- Power input: 100 W

hönle group		Curing	Drying	Bonding	Potting	Measuring
aladin	eleco-efd	eltosch	hönle	mitronic	panacol	printconcept
						uv-technik speziallampen



Dr. Hönle AG UV Technology, Lochhamer Schlag 1, 82166 Gräfelfing/München, Germany
Phone: +49 89 85608-0, Fax: +49 89 85608-148. www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Dr. Hönle AG. Updated 10/11.